
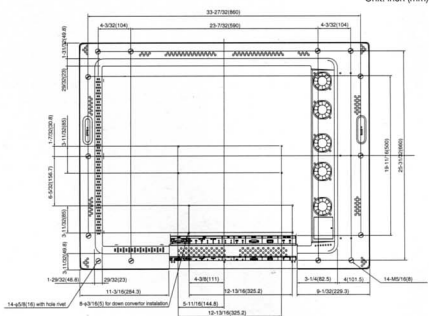



PDP-V402 SPECIFICATIONS

■Dimensions



Unit: inch (mm)

■Terminal Configuration



■PDP-V402 SPECIFICATIONS

Effective Screen Size (W x H)	31-3/4" x 23-3/4" (806.4 x 604.8mm) (40in. diag.)
Aspect Ratio	4:3
Number of Pixels	640 (Hor.) x 480 (Ver.)
Pixel Pitch	1.26 mm (Hor/RGB trio) x 1.26 (Ver.) mm
Color Resolution	256 gray scale, 16.7 million colors
Viewing Angle	More than 160° (Hor.), more than 160° (Ver.)
Dimensions (W x H x D)	36-1/16" x 28-1/8" x 3-7/16" (916 x 714 x 88 mm)
Weight	67 lbs. 14 oz (30.8 kg)
Power Consumption	350 W (2 W at stand by)
Power Requirements	AC 100-120V±10%, 50/60Hz (3.5A)
Operating Temperature	32°F-104°F (0°C-40°C)
Operating Humidity	20-80%
Operating Atmospheric Pressure	0.8-1.1 atmospheric pressure
Safety Regulations	UL 1492, FCC class A

■Video Input Terminals

	Connector	Level/Impedance
Composite Video	BNC	1Vp-p/75 Ω
Y/C Separation Signal	BNC	1Vp-p/75 Ω
Analog RGB Signal	BNC	280mVp-p/75 Ω
	RGB	700mVp-p/75 Ω
	SYNC	2-5Vp-p/75 Ω, 2.2k switchable
Video Input Signal	RGB	700mVp-p/75 Ω
	SYNC	2-5Vp-p/75 Ω

Video Input Signal NTSC Horizontal Frequency : 15.75 kHz
Vertical Frequency : 59.94 Hz

■Video Output Terminals


	Connector	Level/Impedance
Composite Video	BNC	1Vp-p/75 Ω

TV Standard NTSC

■Computer Systems

	Resolution	Horizontal Frequency	Vertical Frequency
PC/AT Compatible	640 x 480	31.5 kHz	60.0 Hz
		37.5 kHz	75.0 Hz
		37.9 kHz	72.8 Hz
Macintosh	640 x 480	35.0 kHz	66.7 Hz
PC9800	640 x 400	24.8 kHz	56.4 Hz
		31.5 kHz	70.1 Hz

■Optional Down Converter PDA-4003

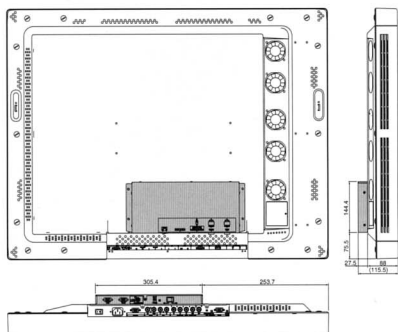

■Accessories

- Remote Control Unit x 1
- Remote Control Unit Case x 1
- AA(R6) Battery x 2
- Power Cord x 1
- Cable Clamp x 3
- Stand x 2
- Washer x 2
- Bolt x 2
- Operation Manual
- Warranty Card

*Macintosh is a registered trademark of Apple Computer, Inc. *PC-9800 is a registered trademark of NEC Corporation. *Design and specifications are subject to change without notice.